

VARIMETER

Overcurrent Relay

IK 9270, IL 9270, IP 9270, SK 9270, SL 9270, SP 9270

02241259



IK 9270



IL 9270



IL 9270/5_ _



SL 9270/5_ _



SK 9270



IP 9270



SL 9270CT



SP 9270CT

- According to IEC/EN 60 255-1
- IP 9270, SP 9270CT: 3-phase
IK 9270, SK 9270, IL 9270, SL 9270CT: single phase
- Measuring ranges from 0.1 ... 100 A
- Settable response value
- Fixed hysteresis
- Settable time delay
- De-energized on trip
- As option energized on trip
- LED indicators
- With auxiliary voltage
- Auxiliary supply and measuring input galvanic separated
- Devices available in 2 enclosure versions:
 - I-model, e.g. IK _ _ _ _ , depth 61 mm
with terminals at the bottom for installation systems and industrial distribution systems according to DIN 43 880
 - S-model, e.g. SK _ _ _ _ , depth 100 mm
with terminals at the top for cabinets with mounting plate and cable duct
- Width IK 9270, SK 9270: 17.5 mm
IL 9270, SL 9270CT: 35 mm
IP 9270, SP 9270CT: 70 mm

Approvals and Markings



*) only IL-devices

Applications

Overcurrent detection in single phase or 3-phase voltage systems

Indicators

IK 9270.11, SK 9270.11

IL 9270.11/5_ _ ,

SL 9270.11/5_ _ :

LED green:

aux. supply connected

LED yellow:

output contacts switched

IL 9270, SL 9270,

IP 9270, SP 9270:


LED green:

current within limits


LED red I_{max} :

overcurrent


Function Diagram IK/SK 9270, IL/SL 9270.11/500

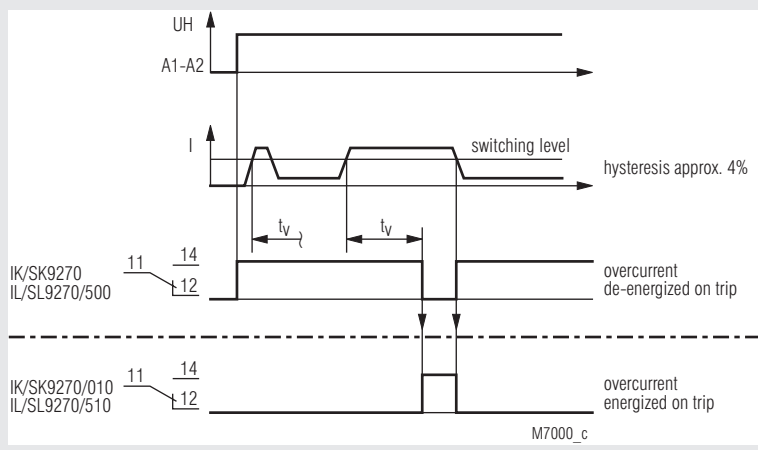


Function Diagram IL 9270.12, SL 9270.12

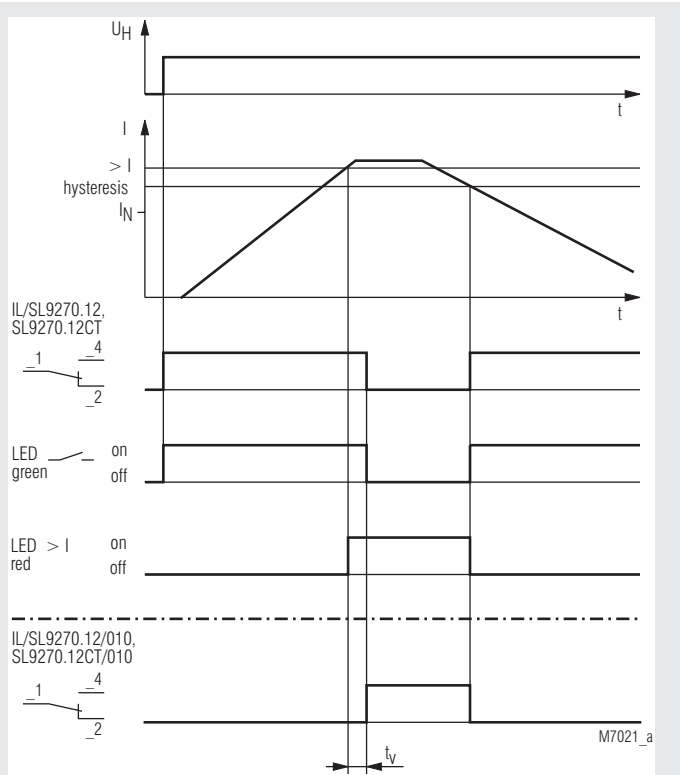


Function Diagram IP 9270, SP 9270

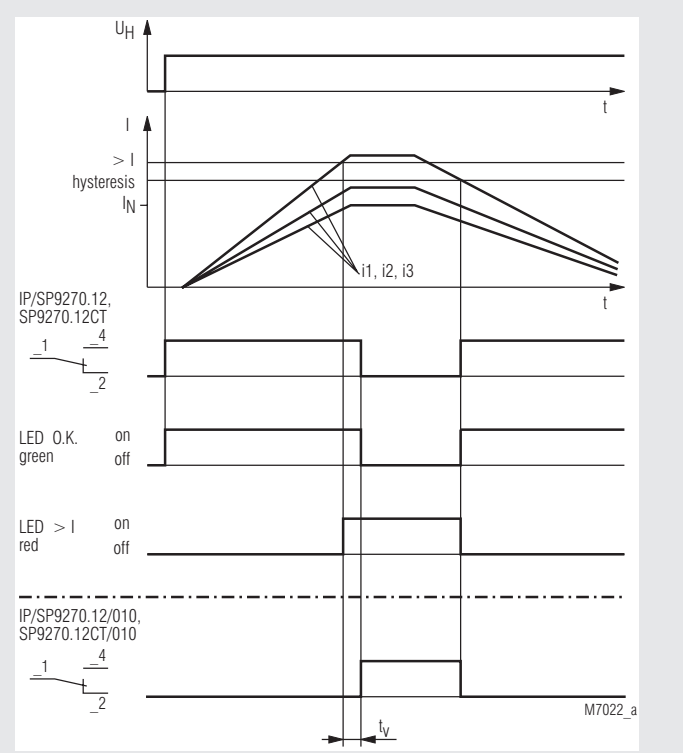


Circuit Diagrams

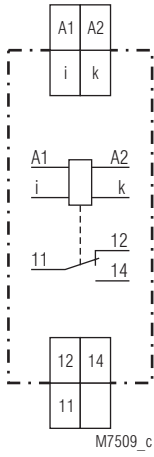


IK 9270.11, SK 9270.11

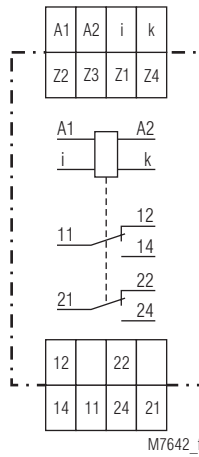


IL 9270.12, SL 9270.12

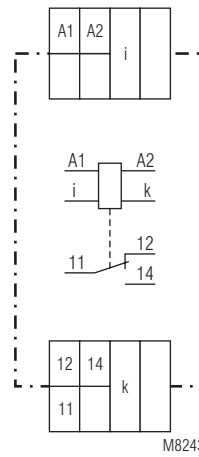


IL 9270.11/5_

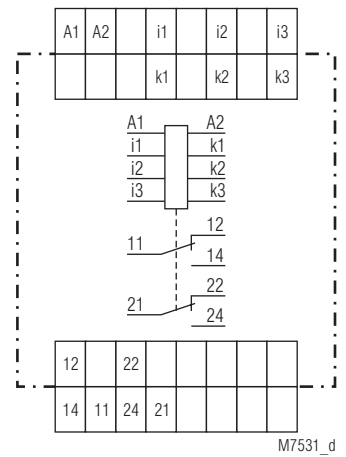

IP 9270.12, SP 9270.12

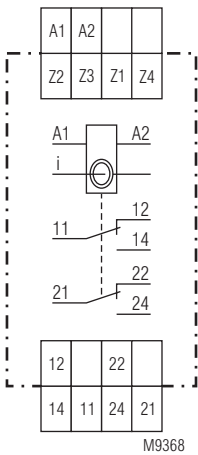

SL 9270.12CT

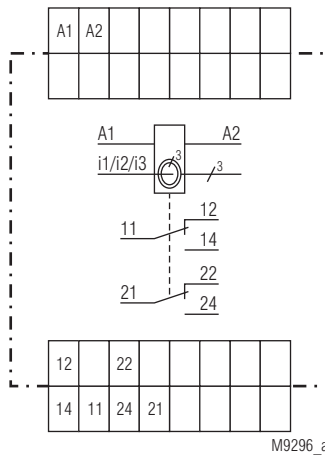







SP 9270.12CT

Connection Terminals

Terminal designation	Signal designation
A1, A2	Auxiliary voltage AC or DC
i, k	Current measuring circuit AC or DC
i1, k1; i2, k2; i3, k3	Current measuring circuit phase 1; 2; 3
Z1 / Z2, Z3, Z4	Measuring ranges with bridges via terminals
11, 12, 14	Contacts Rel. 1
21, 22, 24	Contacts Rel. 2

Technical Data

Type						
	IK 9270	SL 9270/5_ _	IL 9270	SL 9270CT	IP 9270	SP 9270CT
Depth 61 mm	IK 9270.11	IL 9270.11/5_ _	IL 9270.12	-	IP 9270.12	-
Depth 100 mm	SK 9270.11	SL 9270.11/5_ _	SL 9270.12	SL 9270.12CT	SP 9270.12	SP 9270.12CT
Width	17.5 mm	35 mm	35 mm	35 mm	70 mm	70 mm
Measuring input	single-phase	single-phase	single-phase	single-phase	3-phase	3-phase
Measuring range (Nominal frequency 50 ... 400 Hz)	0.1 ... 15 A 4 part ranges settable with switch: 0.1 ... 1 A 0.5 ... 5 A 1 ... 10 A 1.5 ... 15 A Max. thermal continuous current: 20 A at 50 °C 15 A at 60 °C	0.1 ... 50 A 5 part ranges settable with switch: 0.1 ... 1 A 0.5 ... 5 A 2.5 ... 25 A 3 ... 30 A 5 ... 50 A Max. thermal continuous current: 50 A at 50 °C 60 A at 40 °C	0.1 ... 15 A 4 part ranges programmable with bridges: 0.1 ... 1 A (Z1-Z2) 0.5 ... 5 A (Z1-Z3) 1 ... 10 A (Z1-Z4) 1.5 ... 15 A (Z3-Z1-Z4) Max. thermal continuous current: 20 A t 50 °C 15 A at 60 °C	0.5 ... 100 A 4 part ranges programmable with bridges: 0.5 ... 5 A (Z1-Z2) 2.5 ... 25 A (Z1-Z3) 7.5 ... 75 A (Z1-Z4) 10 ... 100 A (Z3-Z1-Z4) Max. thermal continuous current: limited only by diameter of cable 25 mm ²	0.1 ... 15 A 1 fixed measuring range per unit 0.1 ... 1 A 0.5 ... 5 A 1 ... 10 A 1.5 ... 15 A Max. thermal continuous current: 3 x 15 A t 50 °C 3 x 20 A at 45 °C	0.5 ... 100 A 1 fixed measuring range per unit 0.5 ... 5 A 2.5 ... 25 A 5 ... 50 A 7.5 ... 75 A 10 ... 100 A Max. thermal continuous current: limited only by diameter of cable 25 mm ²
	5 ... 750 mA^{*)} 4 part ranges settable with switch: 5 ... 50 mA 25 ... 250 mA 50 ... 500 mA 75 ... 750 mA Max. thermal continuous current: 5 A at 50 °C		0.01 ... 1.5 A 4 part ranges programmable with bridges: 0.01 ... 0.1 A (Z1-Z3) 0.5 ... 0.5 A (Z1-Z2) 0.1 ... 1 A (Z1-Z4) 0.15 ... 1.5 A (Z2-Z1-Z4) Max. thermal continuous current: 20 A at 50 °C 15 A at 60 °C			
Max. current at 50 °C		all ranges 80 A / 3 s				
Wire current path Solid Stranded ferruled	2 x 2.5 mm ² 2 x 1.5 mm ²	1 x 10 mm ² 1 x 6 mm ²	2 x 2.5 mm ² 2 x 1.5 mm ²	CT-diameter = 10 mm 25 mm ²	2 x 2.5 mm ² 2 x 1.5 mm ²	CT-diameter = 10 mm 25 mm ²
Contacts	1 changeover	1 changeover	2 changeover	2 changeover	2 changeover	2 changeover
Weight:	IK 9270: 70 g SK 9270: 90 g	IL 9270/5_ _: 125 g SL 9270/5_ _: 150 g	IL 9270: 125 g SL 9270: 150 g	approx. 230 g	IP 9270: 200 g SP 9270: 250 g	approx. 470 g

^{*)} Rated impulse voltage / pollution degree (auxiliary voltage - measuring circuit): 4 kV/2

Technical Data

Max. overload: see table
Temperature influence: $\leq 0.05\%$ / K
Reaction time: see characteristic switching delay
Internal resistor: $< 5\text{ m}\Omega$

Setting Ranges

Response value: infinite variable within measuring range
Hysteresis: approx. 4 % of setting value, fixed
Repeat accuracy: $\leq \pm 1\%$
Switching delay: 0.1 ... 20 sec settable

Auxiliary Circuit

Auxiliary voltage U_H : AC/DC 24 V, AC 220 ... 240 V
 other voltages on request

Voltage range

at AC: 0.8 ... 1.1 U_H
 at DC: 0.8 ... 1.25 U_H

Nominal consumption

at AC 230 V:
 IL/SL 9270, IP/SP 9270: 3.2 VA
 IK/SK 9270, IL/SL 9270/500: 2.3 VA
 at DC 24 V:
 IL/SL 9270, IP/SP 9270: 0.8 W
 IK/SK 9270, IL/SL 9270/500: 0.4 W
Nominal frequency: 50 / 60 Hz
Frequency range: $\pm 5\%$

Output

Contacts

IK 9270.11, SK 9270.11
 IL/SL 9270.11/5_ _ : 1 changeover contact
 IL 9270.12, SL 9270.12
 SL 9270.12CT: 2 changeover contacts
 IP 9270.12, SP 9270.12
 SP 9270.12CT: 2 changeover contacts
Thermal current I_{th} : 5 A

Switching capacity

to AC 15
 NO contact:
 IK 9270, IL 9270/5_ _ : 3 A / AC 230 V IEC/EN 60 947-5-1
 NC contact: 1 A / AC 230 V IEC/EN 60 947-5-1
 IL/SL 9270, IP/SP 9270,
 SL 9270CT, SP 9270CT: 5 A / AC 230 V IEC/EN 60 947-5-1
 NC contact: 2 A / AC 230 V IEC/EN 60 947-5-1
Electrical life
 to AC 15 bei 1 A, AC 230 V
 NO contact
 IK/SK 9270, IL/SL 9270/5_ _ : 3 x 10⁵ switching cycles IEC/EN 60 947-5-1
 to AC 15 at 2 A, AC 230 V
 IL/SL 9270, IP/SP 9270,
 SL 9270CT, SP 9270CT: 2 x 10⁵ switching cycles IEC/EN 60 947-5-1

Short-circuit strength

max. fuse rating:
 IK/SK 9270, IL/SL 9270/5_ _ : 4 A gL IEC/EN 60 947-5-1
 IL/SL 9270, IP/SP 9270
 SL 9270CT, SP 9270CT: 6 A gL IEC/EN 60 947-5-1

Mechanical life: $> 50 \times 10^6$ switching cycles

Technical Data

General Data

Operating mode: Continuous operation
Temperature range
 Operation: - 20 ... + 60°C
 Storage: - 25 ... + 70°C
Altitude: $< 2.000\text{ m}$

Clearance and creepage distances

rated impulse voltage/
 pollution degree: IEC 60 664-1

	IP/SP	IK/SK IL/SL-devices/5_ _	IL/SL
Auxiliary voltage - Contacts	4 kV/2	4 kV/2	4 kV/2
Auxiliary voltage - Measuring circuit	6 kV/2	6 kV/2 ^{*)}	4 kV/2
Measuring circuit - Contacts	6 kV/2	6 kV/2	4 kV/2
Measuring circuit-Measuring circuit	6 kV/2	-	-
Contacts-Contacts	4 kV/2	-	4 kV/2

The contacts are not designed for voltage systems with 400 / 690 V.

^{*)} 4 kV/2 at IK/SK 9270 with measuring range 5 ... 750 mA

EMC

Electrostatic discharge: 8 kV (air) IEC/EN 61 000-4-2
 HF irradiation:
 IK/SK9270, IP/SP 9270,
 SL/SP 9270:
 80 MHz ... 1 GHz: 20 V / m IEC/EN 61 000-4-3
 1 GHz ... 2.7 GHz: 10 V / m IEC/EN 61 000-4-3
 SL/SP 9270CT, SL9270/5:
 80 MHz ... 2.7 GHz: 10 V / m IEC/EN 61 000-4-3
 Fast transients: 4 kV IEC/EN 61 000-4-4
 Surge voltages between
 wires for power supply
 IK/SK 9270, IL/SL 9270/5_ _ : 2 kV IEC/EN 61 000-4-5
 IL/SL 9270, IP/SP 9270,
 SL/SP 9270CT: 1 kV IEC/EN 61 000-4-5
 between wire and ground:
 IK/SK 9270, IL/SL 9270/5_ _ : 4 kV IEC/EN 61 000-4-5
 IL/SL 9270, IP/SP 9270,
 SL/SP 9270CT: 2 kV IEC/EN 61 000-4-5
 HF wire guided: 10 V IEC/EN 61 000-4-6
 Interference suppression: Limit value class B EN 55 011

Degree of protection

Housing: IP 40 IEC/EN 60 529
 Terminals: IP 20 IEC/EN 60 529

Housing:

Thermoplastic with V0 behaviour
 according to UL subject 94
 Amplitude 0.35 mm
 frequency 10 ... 55 Hz IEC/EN 60 068-2-6
 20 / 060 / 04 IEC/EN 60 068-1

Climate resistance:

Terminal designation:

EN 50 005
 2 x 2.5 mm² solid or
 2 x 1.5 mm² stranded ferruled
 DIN 46 228-1/-2/-3/-4
 0,6 mm²

Wire connection:

Min. cross section:
 Insulation of wires
 or sleeve length: 10 mm
Wire fixing: Flat terminals with self-lifting
 clamping piece IEC/EN 60 999-1
 0.8 Nm
Fixing torque: DIN rail IEC/EN 60 715

Dimensions

Width x height x depth

IK 9270: 17.5 x 90 x 61 mm
 SK 9270: 17.5 x 90 x 100 mm
 IL 9270: 35 x 90 x 61 mm
 SL 9270, SL 9270CT: 35 x 90 x 100 mm
 IP 9270: 70 x 90 x 61 mm
 SP 9270, SP 9270CT: 70 x 90 x 100 mm

CCC-Data

Switching capacity

to AC 15: 5 A / AC 230 V IEC/EN 60 947-5-1
to DC 13: 2 A / DC 24 V IEC/EN 60 947-5-1



Technical data that is not stated in the CCC-Data, can be found in the technical data section.

Standard Types

IK 9270.11/010 AC 220 ... 240 V 50/60 Hz 0.1 ... 15 A

Article number: 0050330

SK 9270.11/010 AC 220 ... 240V 50/60Hz 0.1 ... 15 A

Article number: 0050736

- Single phase
- 4 programmable ranges up to 15 A
- Energized on trip
- Auxiliary voltage U_H : AC 220 ... 240 V
- 1 changeover contact
- Width: 17.5 mm

IP 9270.12/010 AC 220 ... 240 V 50/60 Hz 0.5 ... 5 A

Article number: 0049438

SP 9270.12/010 AC 220 ... 240 V 50/60 Hz 0.5 ... 5 A

Article number: 0050736

- 3-phase
- Range: 0.5 ... 5 A
- Energized on trip
- Auxiliary voltage U_H : AC 220 ... 240 V
- 2 changeover contacts
- Width: 70 mm

Variants


IK 9270.11, SK 9270.11:	Single phase current relay, de-energized on trip, 1 changeover contact
IL 9270.12, SL 9270.12:	Single phase current relay, de-energized on trip, 2 changeover contacts
IL 9270.12/010, SL 9270.12/010:	Single phase current relay, energized on trip, 2 changeover contacts
IL 9270.11/500, SL 9270.11/500:	Same as IK/SK 9270.11, except with 5 measuring ranges from 0.1 ... 50 A
IL 9270.11/510, SL 9270.11/510:	Same as IK/SK 9270.11/010, except with 5 measuring ranges from 0.1 ... 50 A
IP 9270.12, SP 9270.12:	3-phase current relay, de-energized on trip, 2 changeover contacts
SL 9270.12CT:	Single phase current relay with built in CT, de-energized on trip, 2 changeover contacts
SP 9270.12CT:	3-phase current relay with built in CT, energized on trip, 2 changeover contacts

Ordering Example for variants

SP 9270 .12 CT / _ 0 AC 220 ... 240 V 50 / 60 Hz 5 ... 50 A

- Measuring range
- Nominal frequency
- Auxiliary voltage
- 0: de-energized on trip
- 1: energized on trip
- Variant, if required
- Built in CT
- Contacts
- Type

Characteristics

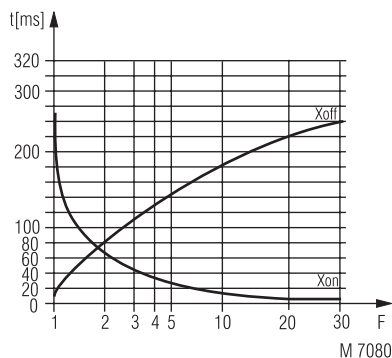

Switching delay

The characteristic shows the switching delay depending on the values of X_{on} - X_{off} when switching the current on or off. A slow current change reduces the delay.

$$F = \frac{I_{\text{applied}}}{I_{\text{setting}}}$$